

VALUE OF HORSE MANURE FOR RENEWABLE ENERGY PRODUCTION: ANAEROBIC DIGESTION, BIOGAS GENERATION, AND CONTRIBUTIONS TO SUSTAINABLE DEVELOPMENT

Fatih YILDIRIM¹  and Yonca AÇAR¹ 

Department of Animal Science, Faculty of Veterinary Medicine, University of Atatürk, Erzurum, 25100, Turkey

[✉]Email: fatihyildirim@atauni.edu.tr

[↳]Supporting Information

ABSTRACT: There are various methods like composting, combustion, gasification, pyrolysis, and anaerobic digestion to convert animal wastes that harm the environment into various bio-products. Horse manure containing lower ash and higher rate of lignin compositions can be potentially reuse as a valuable feedstock in anaerobic digestion method to produce nutrient-rich digestate (bio-fertilizer) clean and cheap biofuels, and bio-energy to replace the cost effective fossil fuels which not only make climate change but harms our health by generating toxic emissions and contamination of soil and water. Therefore, converting bio wastes into useful green resources especially using anaerobic co-digestion is necessary to reduce their adverse environmental impact and can contribute towards the achievement of sustainable development goals (SDGs) 2, 3, 5, 6, 7, 9, 12, 13 and 15. As can be seen today, various animal manure types have begun to be used in different situations for their green benefits. This review aimed to provide an overview of the transformation of horse manure into compost, biogas in terms of its preferability as a renewable energy source or a value-added product that mitigate the environmental problems and contribute to the SDGs specially 7, 9, 12, and 13. The potential of animal manure to produce biomaterials, organic acids, biofuels and bioenergy is clear. Therefore, bioprocesses or biorefineries using this biomass as raw material may be promising in the near future in the context of bioeconomy, may help increase renewable energy production and may become capable of promoting innovation that boosts the value of livestock-derived organic fertilizers. There are still needs to extend the development of technologies for converting on-site bio waste resources to useful forms, exploring new and safe biological conversion pathways and bio waste processing methods.

Keywords: Anerobic digestion, Bioenergy, Biogas production, Circular economy, Horse manure, Sustainable development goal

INTRODUCTION

People have sought various methods to reduce the products that are formed as a result of the use of some resources or their need for them and that harm the environment. One of the most important of these methods has been to produce energy from unwanted products.

Today, the need for energy has increased with the increase in the human population and the development of industry and technology. In parallel with the increasing need for energy, the use of fossil resources is also increasing and this increase reveals environmental problems. Generating energy has been an effective choice for the disposal of both useful and unwanted waste products. People who have turned to alternative energy sources to reduce the environmental damage caused by animal waste in particular have tried to produce environmentally friendly and renewable energy sources. At this stage, biogas obtained from organic waste, which is important in the disposal of waste and is seen as environmentally friendly, has emerged as a renewable energy source (Canbaz and Bulut, 2021).

HORSE MANURE

Horse manure is not only rich in nitrogen, phosphorus and potassium but also rich in lignin compositions with a lower ash rate, can be considered as a potential feedstock in converting into bio-oil and solid fuel with high phenolic content (Chong et al., 2019). Processing and transporting horse manure is also easier because of low moisture and high solid content in comparison to dairy manure (Cross, 2017).

Animal manure exhibits a complex structure and can be classified as a lignocellulosic material (plant dry matter) (Hoyos-Seba et al., 2024). Horse manure is a heterogeneous wet mixture of bedding materials and feces (Da Lio et al., 2021). Horse manure is formed by mixing various amounts of feces, urine and various bedding materials (Eriksson et al., 2016). The amount of manure produced by animals is quite effective in the effects of care-feeding and the environment.

The amount of manure produced by horses varies between 9 and 29 m³/horse/year (Lundgren and Petterson, 2004), which corresponds to an average of 8-14 tons/horse/year of collectable wet manure (Cui et al., 2011). According to some researchers, horses produce 17 to 25 kg of feces and 8 to 10 kg of bedding materials per day, depending on their feed, bedding and cleaning systems (Böske et al., 2014; Wartell et al., 2012).

Horse manure can also be reused as a sustainable feedstock for pyrolysis, aimed to both waste treatment and useful end products derivation. The operating parameters, such as carrier gas flow rate (Ng et al., 2017), temperature (Cantrell et al., 2012), and microwave receptor proportion (Yerrayya et al., 2018) followed by process optimisation are main factors of pyrolysis process in the maximum yield (Mushtaq et al., 2015).

When horse manure is examined in terms of energy, it is more effective to be dry, which requires approximately 1.4 MJ of energy to completely dry 1 kg of wet manure. In the 6.1 MJ energy content provided by dry manure, the effectively useful part decreases to 4.7 MJ/kg. In addition, horse manure can provide 4.7 MJ/kg of energy production (Da Lio et al., 2021). The management of horse manure causes environmental problems when emissions occur during the decomposition of organic material, in addition to the non-recycling of nutrients (Eriksson et al., 2016).

The composition of the manure is diverse and depends on the type of animal and its feed (Orlando and Borja, 2020). Some researchers who have conducted research on horse manure have shown the analysis results in Table 1.

Table 1 - Some analysis values of horse manure

Proximate analysis	Ash (%)		Volatile matter (%)		Fixed carbon (%)		Nanda et al. (2016)
	16.70		64.80		10.10		
Ultimate analysis	C (%)	H (%)	O (%)	N (%)	S (%)	C/N (%)	Lee et al. (2021)
	43.00	5.70	49.50	1.00	0.80	43.00	
High Heating Value (HHV)	HHV (MJ/kg)						Da lio et al. (2021)
	17.50						
Chemical analysis	Cellulose (%)		Lignin (%)		Hemicellulose (%)		Lee et al. (2021)
	42.40		7.20		9.20		
	6.30		56.00		23.80		Chong et al. (2018)
	19.20		0.30		12.00		Juntupally et al. (2022)

Compost production

Due to its rich nutrient composition (potassium, nitrogen and phosphorus), manure has historically been utilized as a natural fertilizer and soil conditioner (Oenema et al., 2007). Managing a compost pile requires consideration of the carbon-nitrogen ratio, oxygen, moisture, and temperature. The C:N ratio of horse manure is typically 40:1 due to the large amount of bedding mixed into it, but it generally does not require additional nitrogen as long as it has sufficient moisture and oxygen. Typical horse stable waste tends to be dry. Since approximately 50% moisture content is required to create ideal conditions for compost microbes, horse manure may need to be soaked. It is also desirable to maintain a constant temperature of 130° to 150°F in the interior of the compost pile (Smith and Swanson, 2009). When considering the use of horse manure on agricultural land, it can be spread directly on agricultural land or spread after composting (Swinker et al., 1997). When the effects of spreading are examined, it provides nutrients, increases soil organic matter, improves water holding capacity and soil structure. However, ammonia and nitrates in horse manure can change soil-related ecosystems and pollute surface runoff waters and pose a risk to aquatic life. These disadvantages can be significantly reduced by composting horse manure before spreading on fields (Da Lio et al., 2021).

The physicochemical properties and energy content of various fertilizers are presented as; cow ≈ horse > sheep > poultry > pig manure, but this situation is still debated for different reasons (Hoyos-Seba et al., 2024). It is recommended to use horse manure as a biofertilizer on farms (Lundgren and Petterson, 2009). Because this manure has a lignocellulosic structure, it is suitable for composting (Rodhe et al., 2015; Airaksinen et al., 2001). Due to the high content of bedding material in horse manure, its spontaneous decomposition time is slow (Malgeryd and Persson, 2013). Horse manure without bedding material can be composted in a month, but the content of the bedding material slows down the composting process (Airaksinen et al., 2001). In addition, aeration and mixing should be done to accelerate the composting process in composting (Sindhøj and Rodhe, 2013). In general, the use of horse manure as a soil fertilizer after composting is considered beneficial in terms of improving soil quality. However, some metallic contents and especially nitrogen and phosphorus ratios may exceed those required for crop growth and may cause water pollution due to surface runoff (Eriksson et al., 2016). In addition, there are researchers who question the use of composted horse manure as fertilizer both economically and agriculturally (Lundgren and Petterson, 2009). It has also been reported that some grain

farmers are reluctant to spread manure due to the potential for the formation of an undesirable weed (such as oats) in addition to the crop they plant when they spread horse manure on their fields (Da Lio et al., 2021).

Biogas production

Biogas is a colorless and flammable gas mixture formed as a result of the fermentation of organic substances such as animal and plant waste in airless environments, containing 60-70% methane, 30-40% carbon dioxide and small amounts of hydrogen sulfide, hydrogen, carbon monoxide and nitrogen (Gülen and Çeşmeli, 2012). Efforts to dispose of animal waste products have led people to research the use of these products in different areas. This section of this research addresses the use of manure obtained from horses in biogas production.

The European Union has adopted decisions to encourage waste-to-energy conversion in order to maximize its contribution to decarbonization and reduce waste production (European Commission, 2019). It has also enacted laws that force farmers to transport or treat excess manure obtained from animals (170 kg N/hectare/year) (European Commission, 1991). The interest in anaerobic digestion of horse manure and thus producing biogas has increased with the increasing interest in biogas as a renewable fuel (Eriksson et al., 2016). In studies conducted on horse manure, some researchers (Weiland et al., 2023) reported the obtained biogas and methane values as 185-115 (Day 16-LN kgVS⁻¹) and 207-135 (Day 40-LN kgVS⁻¹), respectively, while others reported 164 (LN kgVS⁻¹) biogas and 277 (LN kgVS⁻¹) methane (Kusch et al., 2008). These values are lower than the biogas energy values obtained from wheat straw (Bauer et al., 2009) (219-484 LN kgVS⁻¹) but similar to the biogas energy values obtained from manure obtained from cows (De Bere, 2000; MarañoN et al., 2001; Saev et al., 2009) (103-184 LN kgVS⁻¹). Ignition tests have shown that the only major limitation in manure combustion is the high moisture content (approximately 60%), and therefore research is being conducted to overcome the detrimental effect of high moisture content and, in particular, its removal efficiency (Da Lio et al., 2021). The economic viability of using horse manure as a substrate for biogas production depends on the availability of manure, the cost of transportation to the biogas plant and the amount of biogas obtained from the substrate, which is affected by the variability of the bedding materials used (Hadin and Eriksson, 2016). Using horse manure for biogas production instead of improper composting reduces its undesirable impact on the environment (Hadin et al., 2017).

ANAEROBIC DIGESTION AND CO-DIGESTION

Anaerobic digestion is an effective method of converting bio wastes like dairy and horse manure into useful forms, and the most common ways of renewable energy recovery (Mata-Alvarez et al., 2014; Mao et al., 2015), which can produce nutrient-rich digestate (bio-fertilizer), biogas and bio-energy simultaneously. There are wide substrates of municipal, agricultural, horticultural and industrial wastes available for anaerobic digestion (Li et al., 2015).

Although food waste with a high methane production potential can be an attractive feedstock for anaerobic digestion (Zhang et al., 2011), but often faces with some disadvantages like low pH, lack of certain nutrients and suboptimal carbon to nitrogen (C/N) ratio (Mata-Alvarez et al., 2014). Solutions were adopted to overcome the deficiencies of mono-digestion and improve the operational stability and economic viability of this method, for example anaerobic co-digestion or simultaneous anaerobic digestion of food waste plus other organic wastes (Hartmann and Ahring, 2005; Banks et al., 2011; Fang et al., 2011), like co-digesting food waste with cattle manure (Zhang et al., 2013) to provide good buffering capacity and favorably alter anaerobic digestion systems using the nutrient profile of manure (Mata-Alvarez et al., 2014).

Horse manure, is one of the major sources of animal manure in Türkiye. Although Kafle and Chen, (2016) reported that the biochemical methane potential of horse manure are the lowest in most cases compared to other livestock manures because of bedding materials (straw, woodchips, etc.) which have a high content of refractory organic compositions such as lignin and cellulose, but Yerrayya et al. (2018) and Mong et al. (2020) stated that the lower ash content and higher lignin compositions in horse manure makes it a potential feedstock to produce solid fuel and phenol-rich bio-oil with high phenolic content. Chong et al., (2019) also reported that the high volatile and low ash content in horse manure indicates the potential for bioenergy recovery. Miron et al. (2000) stated that lignin is one of factors limiting anaerobic digestion of lignocellulosic biomass due to surrounding the cellulose by lignin and preventing the accessibility of cellulose.

Therefore, the efficiency of co-digestion of food waste when mixed with horse manure is limited because of the higher content of lignin. There are some physico-chemical pretreatment methods to destroy the structure of lignin and increase the digestibility of lignocellulose, improve the biochemical methane potential of lignocellulosic biomass, and reduce operating costs and energy of anaerobic digestion systems (Shahriari et al. 2013; Ma et al. 2011, Chekani-Azar et al. 2008). A cost-effective separate biological dissolution process has also been suggested for treating bio waste as a pre-treatment step, so that particles are microbiologically hydrolyzed and their size is reduced prior to anaerobic digestion (Gonzales et al., 2005). Zhang et al. (2017) anticipated that the overall performance of anaerobic digestion could be improved if the hydrolyzing and fermenting process of horse manure and food waste were conducted before methanogenesis within the same anaerobic digester.

The digestion and transport of large fibrous particles in manure or solid manures or other residues can cause pumps and pipes to choke and are limited in conventional anaerobic digesters. On the other hand, the transfer and digestion of large fibrous particles in manures are liable to cause technological issues like choking of pumps and pipes^{18, 19}. For this reason, only liquid manures are commonly used in practical AD plants while the utilization of most of solid manures or other residues with fibrous materials is limited in conventional anaerobic digesters (Mönch-Tegeder et al., 2014).

Anaerobic co-digestion of food waste with livestock manure and sustainable development goals

The anaerobic digestion system is one of the important economies of bio wastes which connect the circular economy and bio-economy to sustainable development goals (SDGs) (Fagerström et al., 2018, Netherlands Enterprise Agency, 2021).

Anaerobic digestion convert disposable waste material into high-end outcomes such as biogas (60% methane and 40% carbon dioxide), and nutrient-rich digestate as bio-fertilizer (Holm-Nielsen et al., 2009 Appels et al., 2011 Lohani et al., 2015) which could be the sustainable future replacement for fossil fuels and is an excellent solution for the reduction of the toxic emissions and contamination of soil and water (Miller et al., 2020; Haltas et al., 2017; Labatut and Pronto, 2018). In addition, anaerobic digestion of biowastes contributes towards the achievement of sustainable development goals (SDGs) 2 (zero hunger), 3 (good health and well-being), 5 (gender equality), 6 (clean water and sanitation), 7 (affordable and clean energy), 9 (industries, innovation and infrastructure), 12 (responsible consumption and production),¹³ (climate action) and 15 (life on land) (Sarika, 2021; World Biogas Association, 2021).

Converting animal manure sources to biogas as renewable energy, which can be successfully done at domestic and industrial scales, can also positively impact sustainable development goals like 7, 9, 12, and 13 SDGs, especially SDGs 9 (innovation) and 13 (climate action) that require urgent implementation for protecting the global health. Shaibur et al. (2021) and Lohani et al. (2021) reported that small-scale biogas systems would contribute to SDGs 1, 3, 5, 7, 13, and 15. The SDGs 3, 4, 5 and 7 are highlighted by Rahman et al. (2019) for biogas implementation, while agriculture residue biogas was considered to SDG 6 by Orner et al. (2020). New method or guidelines are suggested by Obaideen et al. (2022) to enhance the contribution to the SDGs.

Livestock manure as a major issue for sustainable agricultural development can be contributed greatly to the development of some SDGs. Three main categories (reducing emissions to protect the environment, adapting to change, and financing adjustments) which are suggested by the treaties to achieve a zero greenhouse gas emissions (Subbarao et al., 2023) are achievable through the application of the technologies mentioned in Figure 1. The figure shows different processes and technologies of manure treatment using aerobic, anaerobic, and thermochemical pathways so that this optimization in the use of materials and energy is in line with SDGs (Hoyos-Seba et al., 2024).

Therefore, additional efforts are required to overcome the current climate change problem. One of most important efforts is to encourage greater use of existing technologies like those presented in Figure 1 to achieve sustainable development goals through valorization of livestock manure.

Gasification, combustion and pyrolysis of horse manure

The thermochemical biomass conversion process known as gasification offers non-oxidative conversion conditions with very low emissions of pollutants, making it a desirable technique for the production of energy and fuel (Ferdous et al., 2001, Tavasoli et al., 2009). Horse dung is a good candidate for catalytic gasification to produce H₂-rich syngas, according to research by Nanda et al. (2016). A win-win-win situation, including the creation of biofuel (H₂), waste management (manure remediation), and carbon sequestration (application of biochar), might be addressed by using horse manure in supercritical water gasification. Overall, the findings support the idea that using livestock manure in the waste-to-energy conversion process might yield a variety of renewable products with additional value (Nanda et al., 2016).

Horse manure burning directly could be a desirable alternative for combusting heat. Horse manure is rarely used as fuel for three reasons: (a) it is produced in fragmented, mostly small stables that rarely cooperate; (b) regulations vary from one country to another regarding whether or not manure qualifies as a waste or as a renewable fuel and whether it is eligible for renewable energy subsidies (Kusch, 2014); and (c) designing furnaces fed only horse manure is difficult because it needs to be customised for a very wet, heterogeneous, and potentially sticky feedstock (Da Lio et al., 2021). A research comparing horse manure samples of varied origins, management, and ages discovered that the heating values, ash, and melt temperatures were compatible with combustion, but the manure's relatively high moisture content prohibited it from burning (Da Lio et al., 2021).

Pyrolysis is the heat decomposition of a solid fuel in an inert, oxygen-free atmosphere, yielding a liquid or gaseous fuel and a solid residue known as char, which contains the fuel's ash and fixed carbon content (Soria-Verdugo, 2019). According to some recent studies, horse dung is a carbon-neutral biological waste that can be exploited for bioenergy production by microwave-assisted pyrolysis, with microwave pyrolysis producing up to 73.1 vol% of the syngas component (Mong et al., 2020).

Thermochemical conversion methods such as gasification, combustion, and pyrolysis present great opportunities for using horse dung as a viable feedstock for renewable energy production while also addressing waste management and contributing to carbon sequestration. Despite constraints such as high moisture content and regulatory barriers, novel techniques such as catalytic gasification and microwave-assisted pyrolysis have the potential to unlock a wide range of bioenergy products, thereby facilitating the transition to a more sustainable and circular economy.

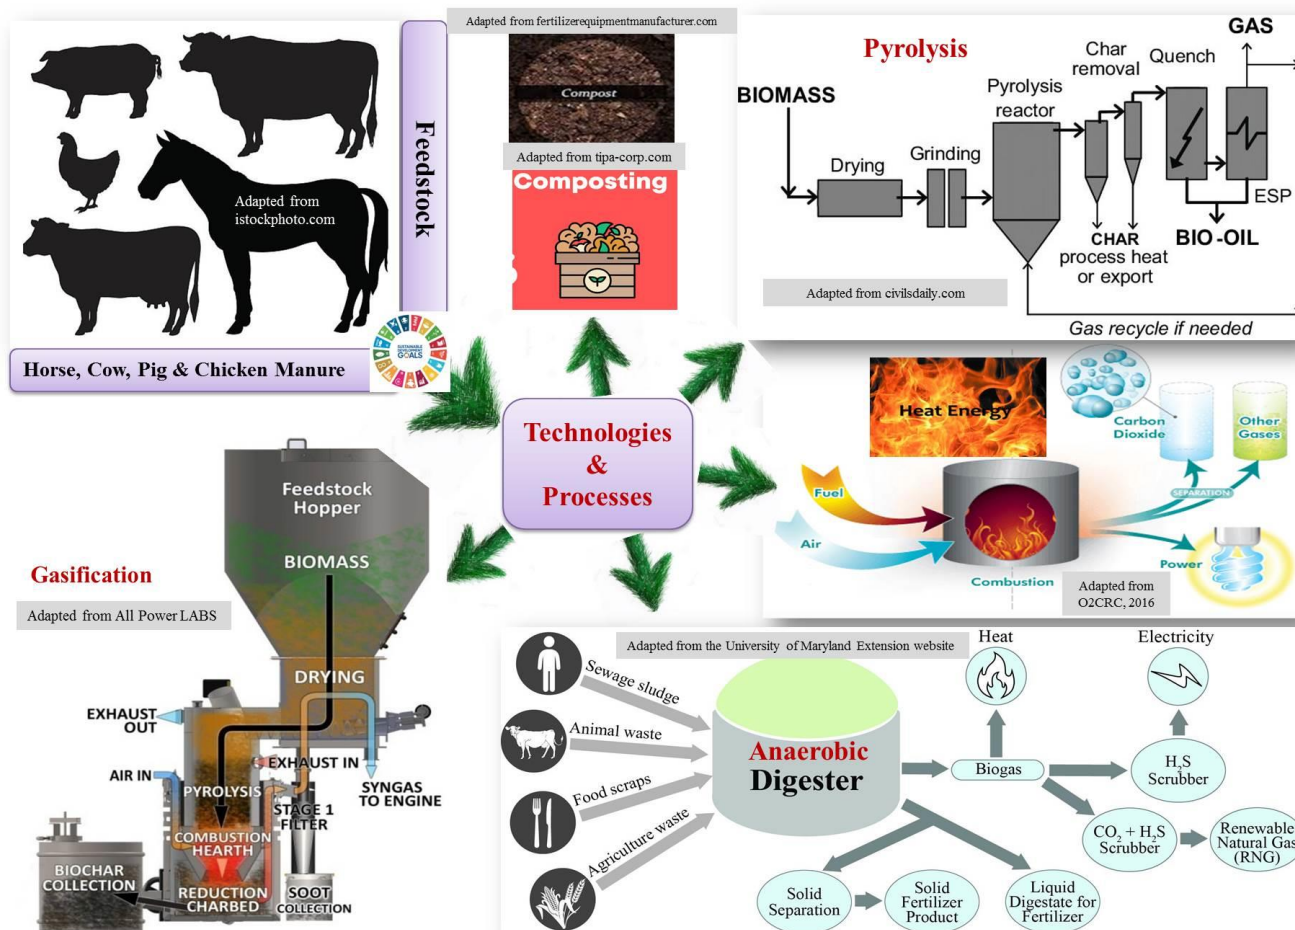


Figure 1 - Products made from various manure treatment technologies and processes.

CONCLUSION AND RECOMMENDATION

In the face of growing environmental challenges and the increasing energy demand, utilizing animal waste—especially horse manure—emerges as a promising solution to address both waste disposal and renewable energy generation. The potential of horse manure as a sustainable feedstock for biogas production, composting, and bioenergy recovery has been extensively explored, demonstrating its value not only as an organic fertilizer but also as a resource for generating clean energy. While its biochemical methane potential may be lower compared to other manures, recent advancements in anaerobic digestion, including co-digestion with food waste and the application of pre-treatment methods, show promise in improving its digestibility and energy yield. Furthermore, adopting biogas technology aligns with the European Union's renewable energy goals and sustainable development objectives, such as climate action, clean energy, and responsible consumption.

Despite the challenges associated with managing horse manure—such as high moisture content and slow decomposition due to bedding materials—innovative technologies offer opportunities to optimize its conversion into valuable byproducts, including biogas and biofertilizers. By enhancing the efficiency of anaerobic digestion systems and promoting horse manure in circular economy models, we can reduce harmful emissions, improve soil quality, and generate renewable energy that supports global sustainability goals. To fully realize the potential of horse manure, further research and technological advancements are needed to overcome existing barriers and scale these solutions. Ultimately, the valorization of animal waste through biogas production and other renewable energy pathways can be crucial in mitigating environmental impacts, fostering energy independence, and contributing to a more sustainable future.

DECLARATIONS

Corresponding author

Correspondence and requests for materials should be addressed to Fatih YILDIRIM; E-mail: fatihyildirim@atauni.edu.tr; ORCID: 0000-0002-9402-4008

Authors' contribution

F. Yildirim and Y. Açar contribute to the research, data analysis, and manuscript writing.

Acknowledgements

The authors thank Y. Betül Apaydin for providing the resources in this research.

Competing interests

The authors declare no competing interests in this research and publication.

REFERENCES

- Airaksinen S, Heinonen-Tanski H, Heiskanen M (2001). Quality of different bedding materials and their influence on the compostability of horse manure. *J. Equine Vet. Sci.*, 21, 125-130. [https://doi.org/10.1016/S0737-0806\(01\)70108-6](https://doi.org/10.1016/S0737-0806(01)70108-6)
- Appels L, Lauwers J, Degruve J, Helsen L, Lievens B, Willems K, Van Impe J, Dewil R (2011). Anaerobic digestion in global bio-energy production: Potential and research challenges. *Renew. Sustain. Energy Rev.*, 15, 4295-4301. <https://doi.org/10.1016/j.rser.2011.07.121>
- Banks CJ, Salter AM, Heaven S, Riley K (2011). Energetic and environmental benefits of co-digestion of food waste and cattle slurry: A preliminary assessment. *Resources, Conservation and Recycling*, 56(1), 71-79. <https://doi.org/10.1016/j.resconrec.2011.09.006>
- Bauer A, Bösch P, Friedl A, Amon T (2009). Analysis of methane potentials of steam-exploded wheat straw and estimation of energy yields of combined ethanol and methane production. *Journal of Biotechnology*, 142(1), 50-55. <https://doi.org/10.1016/j.jbiotec.2009.01.017>
- Böske J, Wirth B, Garlipp F, Mumme J, Van den Weghe H (2014). Anaerobic digestion of horse dung mixed with different bedding materials in an upflow solid-state (UASS) reactor at mesophilic conditions. *Bioresource technology*, 158, 111-118. <https://doi.org/10.1016/j.biortech.2014.02.034>
- Cantrell KB, Hunt PG, Uchimiya M, Novak JM, Ro KS (2012). Impact of pyrolysis temperature and manure source on physicochemical characteristics of biochar. *Bioresource technology*, 1; 107:419-28. <https://doi.org/10.1016/j.biortech.2011.11.084>
- Chekani-Azar V, Valizadeh R, Chekani-Azar S, Sis NM, Shahriar HA, Ahadi F (2008). The Effect of sulfur dioxide (SO₂) and sodium hydroxide (NaOH) on chemical composition and degradability of wheat straw. *Journal of Animal and Veterinary Advances*, 1;7(2):160-4. [Google Scholar](https://doi.org/10.1016/j.jvax.2008.02.004)
- Chong CT, Mong GR, Ng JH, Chong WWF, Ani FN, Lam SS, Ong HC (2019). Pyrolysis characteristics and kinetic studies of horse manure using thermogravimetric analysis. *Energy Conversion and Management*, 180, 1260-1267. <https://doi.org/10.1016/j.enconman.2018.11.071>
- Cross P (2017). The great manure crisis of 2017. *HiPoint Agro Bedding Crop* pp. 1-50.
- Cui Z, Shi J, Li Y (2011). Solid-state anaerobic digestion of spent wheat straw from horse stall. *Bioresource technology*, 102(20), 9432-9437. <https://doi.org/10.1016/j.biortech.2011.07.062>
- Da Lio L, Castello P, Gianfelice G, Cavalli R, Canu P (2021). Effective energy exploitation from horse manure combustion. *Waste Management*, 128, 243-250. <https://doi.org/10.1016/j.wasman.2021.04.035>
- De Bere L. (2000). Anaerobic digestion of solid waste: state-of-the-art. *Water science and technology*, 41(3), 283-290. <https://doi.org/10.2166/wst.2000.0082>
- Eriksson O, Hadin Å, Hennessy J, Jonsson D (2016). Life cycle assessment of horse manure treatment. *Energies*, 9(12), 1011. <https://doi.org/10.3390/en9121011>
- European Commission (1991). Council directive of 12 December 1991 concerning the protection of waters against pollution caused by nitrates from agricultural sources, Off. J. Eur. Comm., pp. 1-8. <https://www.legislation.gov.uk/eu/1991/676/contents>
- European Commission (2019). The European Green Deal. COM/2019/640 final.
- Fagerström A, Al Seadi T, Rasi S, Briseid T (2018). The role of anaerobic digestion and biogas in the circular economy, Vol. 8, pp. 1-24. Cork, Ireland: IEA Bioenergy. [Google Scholar](https://doi.org/10.1016/j.egys.2018.08.001)
- Fang C, Boe K, Angelidaki I (2011). Anaerobic co-digestion of by-products from sugar production with cow manure. *Water research*, 45(11), 3473-3480. <https://doi.org/10.1016/j.watres.2011.04.008>
- Ferdous D, Dalai AK, Bej SK, Thring RW (2001). Production of H₂ and medium heating value gas via steam gasification of lignins in fixed-bed reactors. *The Canadian Journal of Chemical Engineering*, 79(6), 913-922. <https://doi.org/10.1002/cjce.5450790609>
- Gonzales HB, Takyu K, Sakashita H, Nakano Y, Nishijima W, Okada M (2005). Biological solubilization and mineralization as novel approach for the pretreatment of food waste. *Chemosphere*, 58(1), 57-63. <https://doi.org/10.1016/j.chemosphere.2004.08.092>
- Gülen J and Çeşmeli Ç (2012). Biyogaz Hakkında Genel Bilgi ve Yan Ürünlerinin Kullanım Alanları. *Erzincan University Journal of Science and Technology*, 5(1), 65-84. <https://dergipark.org.tr/en/download/article-file/68419>
- Hadin Å and Eriksson O (2016). Horse manure as feedstock for anaerobic digestion. *Waste management*, 56, 506-518. <https://doi.org/10.1016/j.wasman.2016.06.023>
- Hadin Å, Hillman K, Eriksson O (2017). Prospects for increased energy recovery from horse manure-A case study of management practices, environmental impact and costs. *Energies*, 10(12), 1935. <https://doi.org/10.3390/en10121935>
- Haltas I, Suckling J, Soutar I, Druckman A, Varga L (2017). Anaerobic digestion: A prime solution for water, energy and food nexus challenges. *Energy Procedia*, 123, 22-29. <https://doi.org/10.1016/j.egypro.2017.07.280>

- Hartmann H and Ahring BK (2005). Anaerobic digestion of the organic fraction of municipal solid waste: Influence of co-digestion with manure. *Water Research*, 39, 1543-1552. <https://doi.org/10.1016/j.watres.2005.02.001>
- Holm-Nielsen JB, Al Seadi T, Oleskowicz-Popiel P (2009). The future of anaerobic digestion and biogas utilization. *Bioresour. Technol.*, 100, 5478-5484. <https://doi.org/10.1016/j.biortech.2008.12.046>
- Hoyos-Seba JJ, Arias NP, Salcedo-Mendoza J, Aristizabal-Marulanda V (2024). Animal manure in the context of renewable energy and value-added products: A review. *Chemical Engineering and Processing-Process Intensification*, 196, 109660. <https://doi.org/10.1016/j.cep.2023.109660>
- Juntupally S, Arelli V, Begum S, Anupoju GR (2022). Improved biomethanation of horse manure through acid-thermal pretreatment and supplementation of iron nanoparticles under mesophilic and thermophilic conditions, *Biomass Convers. Biorefin.* 12, 2993-3006. <https://doi.org/10.1007/s13399-020-01085-2>
- Kafle GK and Chen L (2016). Comparison on batch anaerobic digestion of five different livestock manures and prediction of biochemical methane potential (BMP) using different statistical models. *Waste Management*, 48, 492-502. <https://doi.org/10.1016/j.wasman.2015.10.021>
- Kusch S, Oechsner H, Jungbluth T (2008). Biogas production with horse dung in solid-phase digestion systems. *Bioresource technology*, 99(5), 1280-1292. <https://doi.org/10.1016/j.biortech.2007.02.008>
- Kusch S (2014). Management and valorisation of equine waste: A review and SWOT analysis. *News Eng. (Power Energy)*, 47-54. [Google Scholar](https://doi.org/10.1016/j.neng.2014.07.001)
- Labatut RA and Pronto JL (2018). Sustainable Waste-to-Energy Technologies: Anaerobic Digestion; (pp. 47-67). Elsevier Inc.: Amsterdam, The Netherlands. <https://doi.org/10.1016/B978-0-12-811157-4.00004-8>
- Lee D J, Yim JH, Jung S, Jang MS, Jeong GT, Jeong KH. et al. (2021). Valorization of animal manure: A case study of bioethanol production from horse manure. *Chemical Engineering Journal*, 403, 126345. <https://doi.org/10.1016/j.cej.2020.126345>
- Li D, Liu S, Mi L, Li Z, Yuan Y, Yan Z, Liu X (2015). Effects of feedstock ratio and organic loading rate on the anaerobic mesophilic co-digestion of rice straw and pig manure. *Bioresource Technology*, 187, 120-127. <https://doi.org/10.1016/j.biortech.2015.03.040>
- Lohani SP, Chhetri A, Khanal SN (2015). A simple anaerobic system for onsite treatment of domestic wastewater. *Afr. J. Environ. Sci. Technol.*, 9, 292-300. <https://doi.org/10.5897/AJEST2014.1848>
- Lohani SP, Dhungana B, Horn H, Khatiwada D (2021). Small-scale biogas technology and clean cooking fuel: assessing the potential and links with SDGs in low-income countries - A case study of Nepal. *Sustainable Energy Technol. Assess.*, 46, Article 101301. <https://doi.org/10.1016/j.seta.2021.101301>
- Lundgren J and Pettersson E (2004). Practical, environmental and economic evaluation of different options for horse manure management. In *International Congress of Chemical and Process Engineering: 22/08/2004-26/08/2004*. [Google Scholar](https://doi.org/10.1016/j.biortech.2009.01.050)
- Lundgren J and Pettersson E (2009). Combustion of horse manure for heat production. *Bioresour. Technol.*, 100, 3121-3126. <https://doi.org/10.1016/j.biortech.2009.01.050>
- Ma J, Duong TH, Smits M, Verstraete W, Carballa M (2011). Enhanced biomethanation of kitchen waste by different pre-treatments. *Bioresource technology*, 102(2), 592-599. <https://doi.org/10.1016/j.biortech.2010.07.122>
- Malgeryd J and Persson T (2013). Hästgödsel: En Naturlig Resurs; Jordbruksverket: Jönköping, Sweden. (In Swedish)
- Mao C, Feng Y, Wang X, Ren G (2015). Review on research achievements of biogas from anaerobic digestion. *Renewable and sustainable energy reviews*, 45, 540-555. <https://doi.org/10.1016/j.rser.2015.02.032>
- Marañón E, Castrillón L, Vázquez I, Sastre H (2001). The influence of hydraulic residence time on the treatment of cattle manure in UASB reactors. *Waste management & research*, 19(5), 436-441. <https://doi.org/10.1177/0734242X0101900508>
- Mata-Alvarez J, Dosta J, Romero-Güiza MS, Fonoll X, Peces M, Astals S (2014). A critical review on anaerobic co-digestion achievements between 2010 and 2013. *Renewable and sustainable energy reviews*, 36, 412-427. <https://doi.org/10.1016/j.rser.2014.04.039>
- Mönch-Tegeder M, Lemmer A, Oechsner H (2014). Enhancement of methane production with horse manure supplement and pretreatment in a full-scale biogas process. *Energy*, 73, 523-530. <https://doi.org/10.1016/j.energy.2014.06.051>
- Miller KE, Grossman E, Stuart BJ, Davis SC (2020). Pilot-scale biogas production in a temperate climate using variable food waste. *Biomass Bioenergy*, 138, 105568. <https://doi.org/10.1016/j.biombioe.2020.105568>
- Miron Y, Zeeman G, Van Lier JB, Lettinga G (2000). The role of sludge retention time in the hydrolysis and acidification of lipids, carbohydrates and proteins during digestion of primary sludge in CSTR systems. *Water research*, 34(5), 1705-1713. [https://doi.org/10.1016/S0043-1354\(99\)00280-8](https://doi.org/10.1016/S0043-1354(99)00280-8)
- Mong GR, Chong CT, Ng JH, Chong WW, Lam SS, Ong HC, Ani FN. (2020) Microwave pyrolysis for valorisation of horse manure biowaste. *Energy Conversion and Management*, 15, 220:113074. <https://doi.org/10.1016/j.enconman.2020.113074>
- Mushtaq F, Abdullah TA, Mat R, Ani FN (2015). Optimization and characterization of bio-oil produced by microwave assisted pyrolysis of oil palm shell waste biomass with microwave absorber. *Bioresource technology*, 1, 190:442-50. <https://doi.org/10.1016/j.biortech.2015.02.055>
- Nanda S, Dalai AK, Gökalp I, Kozinski JA (2016). Valorization of horse manure through catalytic supercritical water gasification. *Waste management*, 52, 147-158. <https://doi.org/10.1016/j.wasman.2016.03.049>
- Netherlands Enterprise Agency (NEA) (2021). Holland Circular Hotspot (HCH). Circular Economy & SDGs: How Circular Economy Practices Help to Achieve the Sustainable Development Goals. Available online: <https://hollandcircularhotspot.nl/publications/> (accessed on 15 November 2021).
- Ng JH, Leong SK, Lam SS, Ani FN, Chong CT. (2017). Microwave-assisted and carbonaceous catalytic pyrolysis of crude glycerol from biodiesel waste for energy production. *Energy Conversion and Management*. 143: 399-409. <https://doi.org/10.1016/j.enconman.2017.04.024>
- Obaideen K, Abdelkareem MA, Wilberforce T, Elsaid K, Sayed ET, Maghrabie HM, Olabi AG (2022). Biogas role in achievement of the sustainable development goals: evaluation, challenges, and guidelines. *J. Taiwan Inst. Chem. Eng.*, 131, Article 104207. <https://doi.org/10.1016/j.jtice.2022.104207>
- Oenema O, Oudendag D, Velthof GL (2007). Nutrient losses from manure management in the European Union. *Livestock science*, 112(3), 261-272. <https://doi.org/10.1016/j.livsci.2007.09.007>
- Orlando MQ and Borja VM (2020). Pretreatment of animal manure biomass to improve biogas production: A review. *Energies*, 13(14), 3573. <https://doi.org/10.3390/en13143573>

- Orner KD, Camacho-Céspedes F, Cunningham JA, Mihelcic JR (2020). Assessment of nutrient fluxes and recovery for a small-scale agricultural waste management system. *J. Environ. Manage.*, 267 (2020), Article 110626. <https://doi.org/10.1016/j.jenvman.2020.110626>
- Rahman KM, Edwards DJ, Melville L, El-Gohary H (2019). Implementation of bioenergy systems towards achieving United Nations' Sustainable development goals in rural Bangladesh. *Sustainability*, 11, p. 3814. 10.3390/SU11143814 Vol. 11, Page 3814. <https://doi.org/10.3390/su11143814>
- Rodhe L, Niklasson F, Oostra H, Gervind P, Ascue J, Tersmeden M, Ringmar A (2015). Managed Drum Composting with Minor Climate Impact-Emissions and Heat Recovery; JTI-Swedish Institute of Agricultural and Environmental Engineering: Uppsala, Sweden. [Google Scholar](#)
- Saev M, Koumanova B, Simeonov IV (2009). Anaerobic co-digestion of wasted tomatoes and cattle dung for biogas production. *Journal of the university of Chemical Technology and Metallurgy*, 44(1), 55-60. <https://doi.org/10.1080/13102818.2009.10818551>
- Sarika J (2021). The contribution of Anaerobic Digestion and Biogas towards Achieving the UN Sustainable Development Goals. *World Biogas Association: London, UK*, pp. 1-20. Available online: www.worldbiogasassociation.org (accessed on 17 November 2021). [Google Scholar](#)
- Soria-Verdugo A (2019). Pyrolysis of sludge and biomass residues. *Wastewater Treatment Residues as Resources for Biorefinery Products and Biofuels*, 155. [Google Scholar](#)
- Shahriari H, Warith M, Hamoda M, Kennedy K (2013). Evaluation of single vs. staged mesophilic anaerobic digestion of kitchen waste with and without microwave pretreatment. *Journal of Environmental Management*, 125, 74-84. <https://doi.org/10.1016/j.jenvman.2013.03.042>
- Shaibur MR, Husain H, Arpon SH (2021). Utilization of cow dung residues of biogas plant for sustainable development of a rural community. *Current Res. Environ. Sustainability*, 3, Article 100026. <https://doi.org/10.1016/j.crsust.2021.100026>
- Sindhøj E and Rodhe L. (Eds.) (2013) Examples of Implementing Manure Processing Technology at Farm Level; JTI-Swedish Institute of Agricultural and Environmental Engineering: Uppsala, Sweden. [Google Scholar](#)
- Smith C and Swanson CA (2009). *Horse Manure Management*. Virginia Cooperative Extension, Publication 406-208. [Google Scholar](#)
- Subbarao PMV, D' Silva TC, Adlak K, Kumar S, Chandra R, Vijay VK (2023). Anaerobic digestion as a sustainable technology for efficiently utilizing biomass in the context of carbon neutrality and circular economy. *Environ. Res.*, 234, Article 116286. <https://doi.org/10.1016/j.envres.2023.116286>
- Tavasoli A, Ahangari MG, Soni C, Dalai AK (2009). Production of hydrogen and syngas via gasification of the corn and wheat dry distiller grains (DDGS) in a fixed-bed micro reactor. *Fuel Processing Technology*, 90(4), 472-482. <https://doi.org/10.1016/j.fuproc.2009.02.001>
- Topal Canbaz G and Polat Bulut A (2021). İç Anadolu Bölgesinde Bulunan Hayvansal Atıkların Biyogaz Potansiyelinin İncelenmesi [Investigation of Biogas Potential of Animal Waste in Central Anatolia Region]. *Türk Tarım ve Doğa Bilimleri Dergisi*, 8(4), 905-912. <https://doi.org/10.30910/turkjans.833381>
- Wartell BA, Krumins V, Alt J, Kang K, Schwab BJ, Fennell DE (2012). Methane production from horse manure and stall waste with softwood bedding. *Bioresource Technology*. 112:42-50. <https://doi.org/10.1016/j.biortech.2012.02.012>
- Weiland K, Alge K, Mautner A, Bauer A, Bismarck A (2023). Horse manure as resource for biogas and nanolignocellulosic fibres. *Bioresource Technology*, 372, 128688. <https://doi.org/10.1016/j.biortech.2023.128688>
- World Biogas Association (2021). *World Biogas Association, Biogas: Pathways to 2030-Report*; World Biogas Association: London, UK, 2021; pp. 1-128. Available online: <https://www.worldbiogasassociation.org/biogas-pathways-to-2030-report/> (accessed on 10 October 2024).
- Yerraya A, Suriapparao DV, Natarajan U, Vinu R (2018). Selective production of phenols from lignin via microwave pyrolysis using different carbonaceous susceptors. *Bioresource technology*, 1, 270:519-28. <https://doi.org/10.1016/j.biortech.2018.09.051>
- Zhang L, Lee YW, Jahng D (2011). Anaerobic co-digestion of food waste and piggery wastewater: focusing on the role of trace elements. *Bioresource technology*, 102(8), 5048-5059. <https://doi.org/10.1016/j.biortech.2011.01.082>
- Zhang J, Loh KC, Lee J, Wang CH, Dai Y, Wah Tong Y (2017). Three-stage anaerobic co-digestion of food waste and horse manure. *Scientific reports*, 28, 7(1):1269. <https://doi.org/10.1038/s41598-017-01408-w>
- Zhang C, Xiao G, Peng L, Su H, Tan T (2013). The anaerobic co-digestion of food waste and cattle manure. *Bioresource technology*, 129, 170-176. <https://doi.org/10.1016/j.biortech.2012.10.138>

Publisher's note: Scienceline Publication Ltd. remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Open Access: This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons licence, and indicate if changes were made. The images or other third party material in this article are included in the article's Creative Commons licence, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons licence and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this licence, visit <https://creativecommons.org/licenses/by/4.0/>.